




Vehicle Filling Stations

100 - 3,000 scfm Up to 5,000 psig



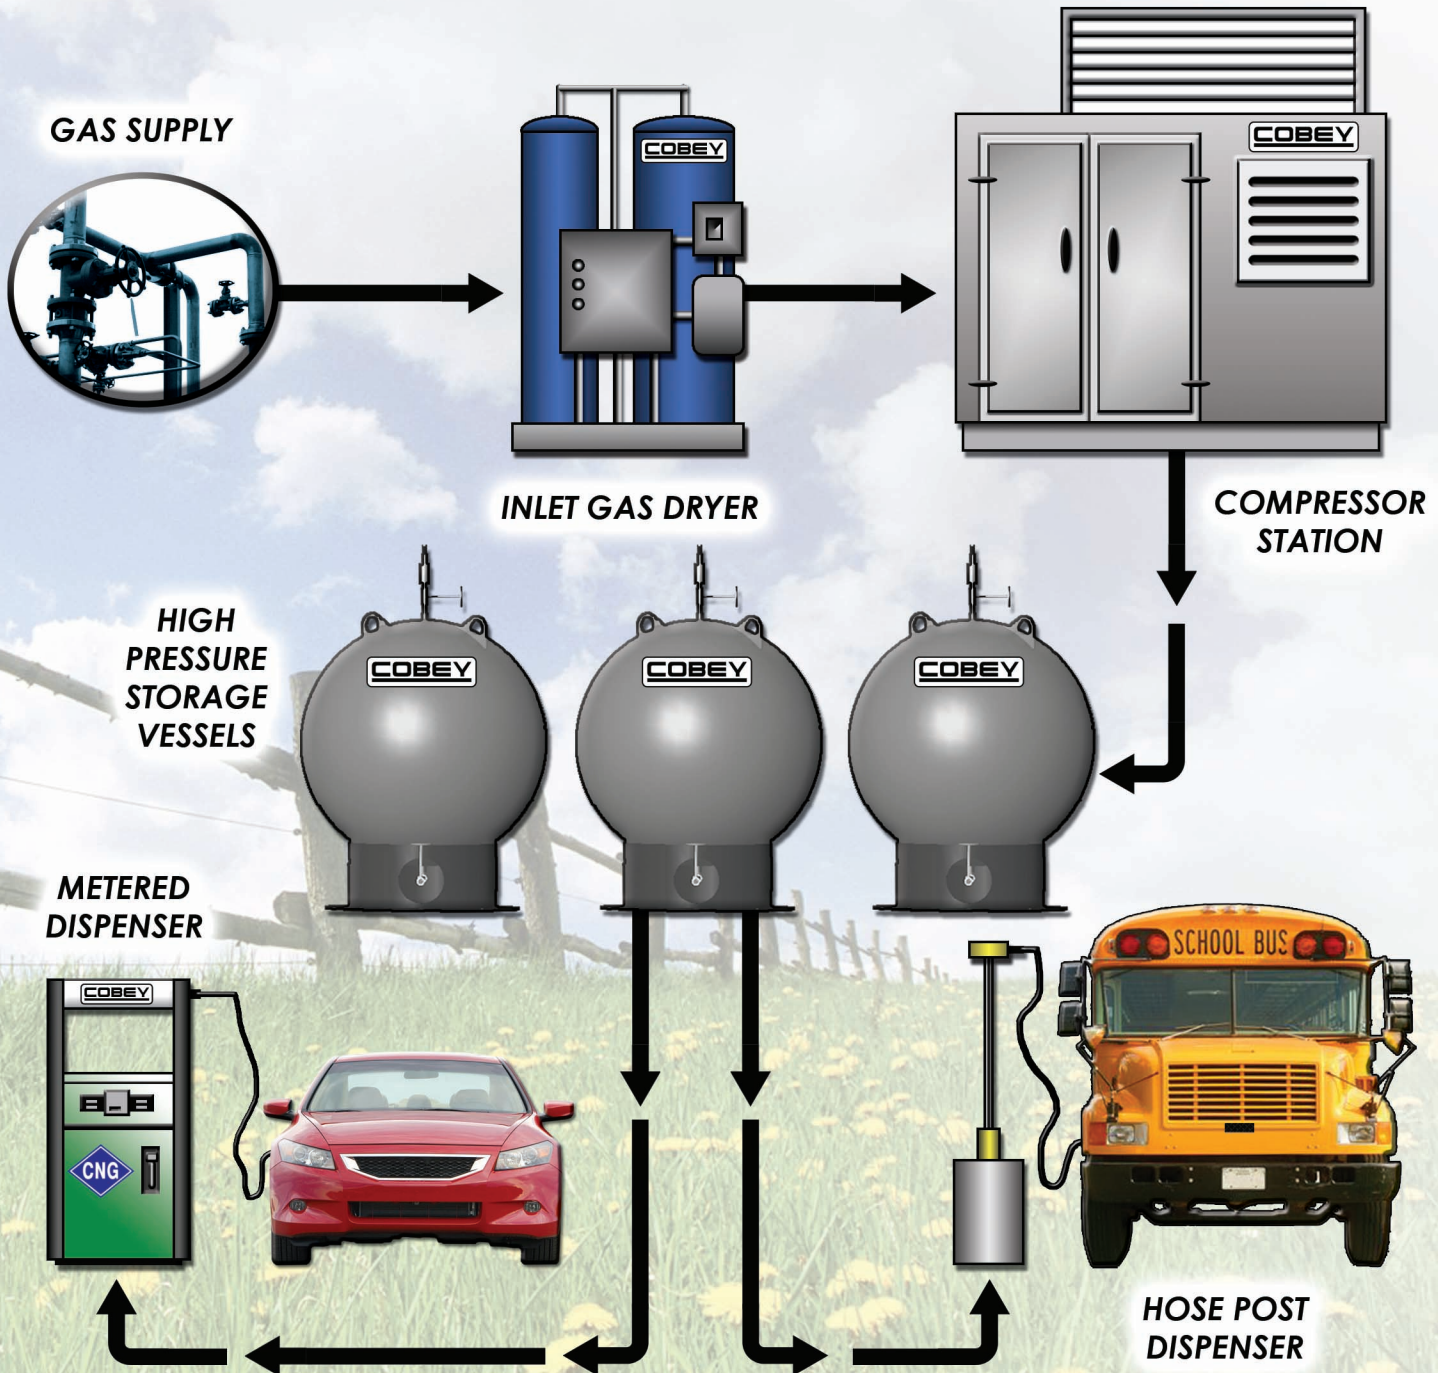

Vehicle Filling Stations Customizable Options


GAS DRYERS

Models:

- Single tower
- Regenerable single tower
- Regenerable twin tower
- Fully automatic heat reactivated twin tower

Specs & Standards:

- ASME Section VIII, Division 1 certified
- Dryer sizing varies depending on available natural gas pressure and compressor flows.

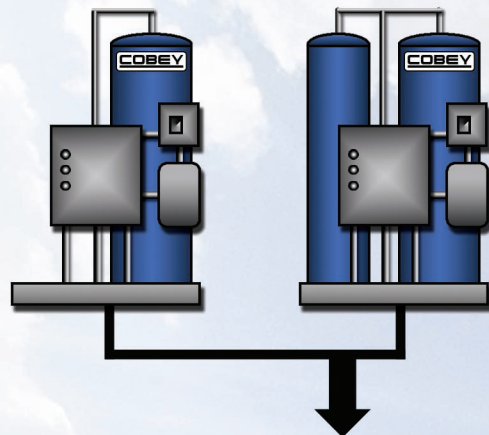

COMPRESSOR STATIONS

Model #	Driver	Flow Range	Stages of Compression	Suction Pressure Range	HP Range
CE-C100	Elec*	92 - 287 scfm	4	18 - 80	48 - 94
CE-C250	Elec*	133 - 474 scfm	4	5 - 50	62 - 185
CE-C500	Elec*	343 - 963 scfm	4	5 - 37	150 - 400

Specs & Standards:


- Accommodates variable flow rates
 - Pressures up to 5,000 PSIG
 - Remote monitoring capable
 - Electric components designed for 480/60Hz/3Ph service
 - Designed to NFPA 52, ASME & local codes
 - Electrical – Class 1, Div 2, Group D
- (*Natural gas engines available)

HIGH PRESSURE STORAGE VESSELS

Model #	Type	Length	Vol @5,000 psig(scF)	Design Pressure
CE-VLA	Tube - 3 bank cascade	23'	36,621	5,500
CE-VRA	Sphere - 3 bank cascade	55"	35,979	5,500

Specs & Standards:

- ASME section VIII, Div 1 & Div 2
- Storage Vessels available in other quantities
- Low volume tubes also available

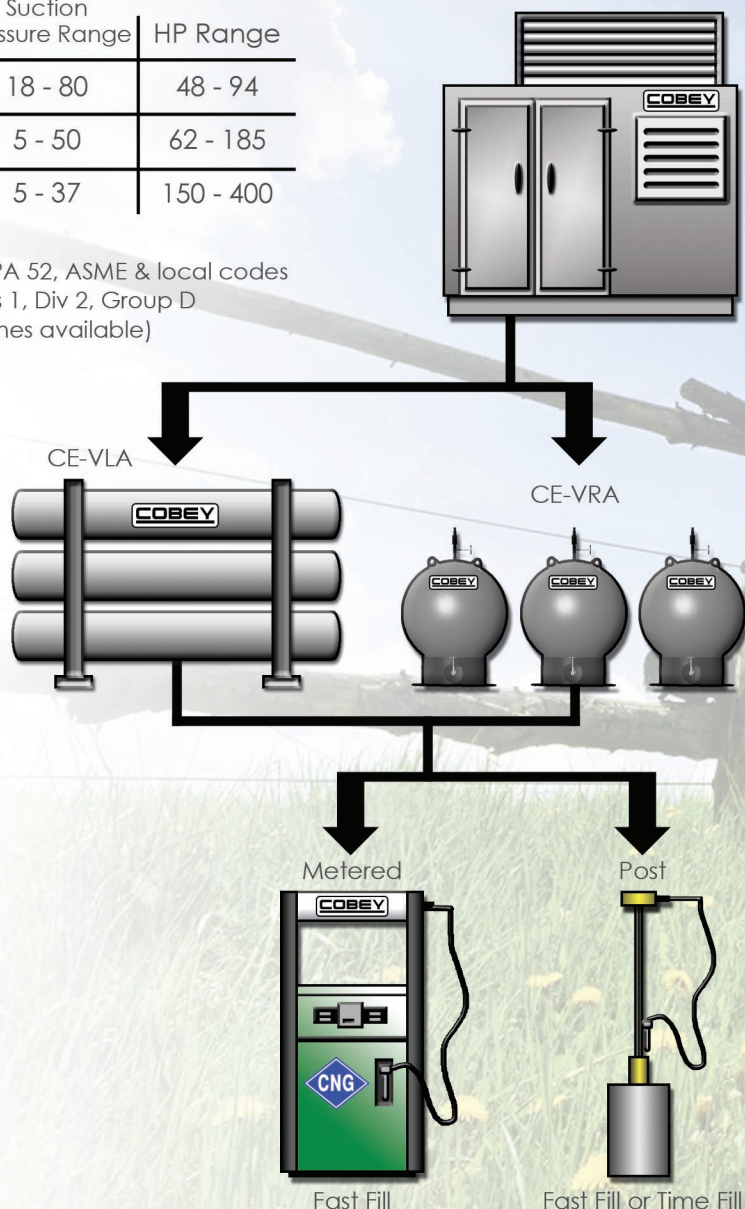


DISPENSERS

Models:

- Metered - Fast Fill
- Post - Fast Fill
- Post - Time Fill

Specs:

- Rated for 3,600 psi vehicle fill pressure, 3,000 psi models also available
- High flow models available

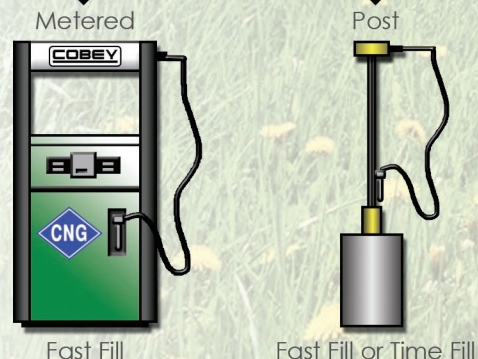

Contact us to start your quote today
cobey@cobey.com +1.716.362.9550
www.cobeyenergy.com

COBEY
ENERGY